

---

# OAI and NASA's scientific and technical information

---

*Michael L. Nelson  
JoAnne Rocker and  
Terry L. Harrison*

---

## The authors

Michael L. Nelson and Terry L. Harrison are at Old Dominion University, Norfolk, Virginia, USA.

JoAnne Rocker is at NASA Langley Research Center, Hampton, Virginia, USA.

---

## Keywords

Data collection techniques, Digital libraries, Data mining, Science, Technology

---

## Abstract

The Open Archives Initiative Protocol for Metadata Harvesting (OAI-PMH) is an evolving protocol and philosophy regarding interoperability for digital libraries (DLs). Previously, "distributed searching" models were popular for DL interoperability. However, experience has shown distributed searching systems across large numbers of DLs to be difficult to maintain in an Internet environment. The OAI-PMH is a move away from distributed searching, focusing on the arguably simpler model of "metadata harvesting". We detail NASA's involvement in defining and testing the OAI-PMH and experience to date with adapting existing NASA distributed searching DLs (such as the NASA Technical Report Server) to use the OAI-PMH and metadata harvesting. We discuss some of the entirely new DL projects that the OAI-PMH has made possible, such as the Technical Report Interchange Project. We explain the strategic importance of the OAI-PMH to the mission of NASA's Scientific and Technical Information Program.

---

## Electronic access

The Emerald Research Register for this journal is available at <http://www.emeraldinsight.com/researchregister>

The current issue and full text archive of this journal is available at <http://www.emeraldinsight.com/0737-8831.htm>

---

Library Hi Tech  
Volume 21 · Number 2 · 2003 · pp. 140-150  
MCB UP Limited · ISSN 0737-8831

## Introduction

The Open Archives Initiative (OAI) is an international consortium focused on furthering the interoperability of digital libraries (DLs) through the use of "metadata harvesting". The metadata harvesting approach is defined in the Open Archives Initiative Protocol for Metadata Harvesting (OAI-PMH) (Lagoze *et al.*, 2002a). Metadata harvesting is in contrast to the "distributed searching" approach of many previous DL interoperability projects for federating different DLs into a single service. While feasible for small numbers of nodes (e.g. < 20), large-scale distributed searching has proven difficult in an Internet environment for large numbers of nodes (e.g. > 100) (Nelson, 2001).

Key to the philosophy of the OAI is the separation of responsibilities into "service providers" and "data providers". In practice, a DL acts as both a data provider and a service provider, so it is important to understand the distinction. A data provider is simply a repository, a collection of metadata records. A service provider offers value added services (e.g. searching, browsing) on the metadata extracted from one or more data providers. More detailed reviews of the OAI-PMH, its origins, version history and applications can be found in (Van de Sompel and Lagoze (2000, 2002) and Lagoze and Van de Sompel (2001).

NASA was an original member of the OAI and has reengineered many of its DLs to capitalize on the popularity of the OAI-PMH. This includes the addition of data providers to existing DLs as well as the creation of new DLs as service providers that harvest from NASA and non-NASA data providers. The NASA Scientific and Technical Information Program supports NASA's active role in DL research and development.

## NASA Scientific and Technical Information Program

The NASA Scientific and Technical Information (STI) Program has existed since the early days of the National Aeronautics and Space Administration. Its purpose, which

---

© Michael L. Nelson, NASA LaRC and  
Terry L. Harrison.



derives from the National Aeronautics and Space Act of 1958, is:

... to provide for the widest practicable and appropriate dissemination of information concerning its activities and the results thereof.

The STI program ensures that NASA remains at the leading edge of research and development (R&D) by quickly and efficiently capturing worldwide STI for use in problem solving, awareness, and knowledge transfer. Its data collection and dissemination supports NASA's mission to communicate scientific knowledge and understanding by collecting and transferring NASA's R&D to the aerospace and academic communities. The program collects the NASA-produced information from ten NASA centers and headquarters, other sources in the USA (such as academia, professional societies and other government and military research facilities), and over 50 foreign countries, and maintains access to the largest collection of aerospace science and technical information in the world. An analysis and review of the STI program's activities can be found in Pinelli (1990), but some STI program activity highlights are to:

- Collect, announce, disseminate, and archive all STI resulting from NASA-funded and sponsored research to reduce duplication of effort and improve productivity and cost-effectiveness of the NASA research effort.
- Acquire other domestic and international STI pertinent to NASA's missions.
- Handle and publish all appropriately reviewed STI for NASA, thus requiring close coordination with export control, patent, copyright, and intellectual property organizations, and international partnerships.
- Build and maintain the STI database.
- Coordinate the agency's various field center STI programs.
- Develop and implement all agency policy and procedures for external release of STI.
- Monitor a contractor facility, the NASA Center for AeroSpace Information (CASI) in Hanover, Maryland.
- Negotiate and handle international STI agreements for NASA.

Over the years, the STI program office has faced challenges in its task to acquire and promote information usage.

Advances in information technology have fueled higher expectations and increased demand for easy and efficient access to scientific information. Internet savvy clientele are used to sophisticated search engines that retrieve documents, photos, music, and other kinds of data.

These users now expect services from information providers such as:

- desktop access to full-text documents and not just abstracts;
- rapid access to documents to meet customer requirements;
- wider access to varied information formats;
- preprints and other forms of gray literature not published in traditional forms (e.g. photos, videos, and graphics);
- high-speed Internet access and Web-based architecture; and
- better data organization and user friendly interfaces.

New challenges to information delivery are not the only concerns of the STI program office. The high cost of supplementing the NASA-produced information with commercial data in order to broaden the access to scientific and technical research has limited the kinds of information that the program can make available. Acquisition of commercial data is expensive and restrictive licensing hinders efforts by the STI program office to enhance its aerospace knowledge base.

As the STI program continues to face funding challenges, finding alternatives to commercially available information is necessary to ensure that NASA DL users have the information they need. The emergence of the OAI as a technology bridge connecting heterogeneous data sources offers the STI program a way to build its collection, circumventing the problems associated with commercial data. Further, as more information providers start using the OAI-PMH for data exchange, the breadth and scope of information available to the STI program will grow.

## NASA DL history


NASA's history with Web-based DLs dates back to 1993, when a WWW interface was provided for the Langley technical report server (LTRS) (Nelson and Gottlich, 1994; Nelson *et al.*, 1994; Roper *et al.*, 1994)[1]. Prior to this, LTRS was simply an anonymous FTP server that distributed technical reports authored and sponsored by NASA Langley Research Center. However, LTRS provided access to only reports from NASA Langley Research Center, and not other NASA centers and institutes. Beginning in 1994, software used to create LTRS was shared with other NASA installations and "LTRS-like" DLs were setup. However, it was not until 1995 that the NASA technical report server (NTRS)[2] was setup to provide integrated searching between the various NASA Web-based DLs (Nelson *et al.*, 1995). Since then NTRS has proven extremely successful with the general public and averages approximately 30,000 search sessions per month. The total collection accessible through NTRS is approximately 4.5 million abstracts and 300,000 full-text publications.

The architecture for this version of NTRS is shown in Figure 1, and a screen capture of the user interface is shown in Figure 2. Integration of the 20 separate nodes comprising NTRS was done through distributed searching. A single Perl script generates the NTRS interface, processes and dispatches queries to a daemon specifically assigned to each NTRS node. The main script gathers the results from each of the daemons and presents the results to the user.

No attempt is made to integrate the results from each node in any meaningful manner; the architecture of the institutional nodes was exposed to the user. Although the searching is done in parallel, generating the results will not run faster than the slowest component. If for some reason a component is not reachable, the entire search will be held up waiting for that search request to timeout. Thus for performance reasons, user queries are not broadcast to all 20 nodes by default, but rather only to six of the more popular nodes. Seventeen of the nodes support different versions of WAIS and the three nodes from the Astrophysics Data Service utilize a non-WAIS version of Z39.50 (Kurtz *et al.*, 1999). Popular in the early days of the WWW, WAIS (Kahle *et al.*, 1992) is an Internet based subset of the venerable Z39.50 standard for distributed information retrieval (Lynch, 1997).

While the current version of NTRS is popular and useful, its distributed searching architecture imposes many limitations. Since NTRS does not contain any holdings of its own, it is dependent on the quality and availability of its constituent nodes. As has been reported for similar distributed searching DLs, the availability of all nodes can be poor (Powell and French, 2000). Furthermore, differences in syntax and semantics between the various search engines limits the complexity of the searches that can be specified. While NTRS currently does some search syntax normalization, the mappings provided are less than complete.

Figure 1 Architecture of the distributed searching NTRS

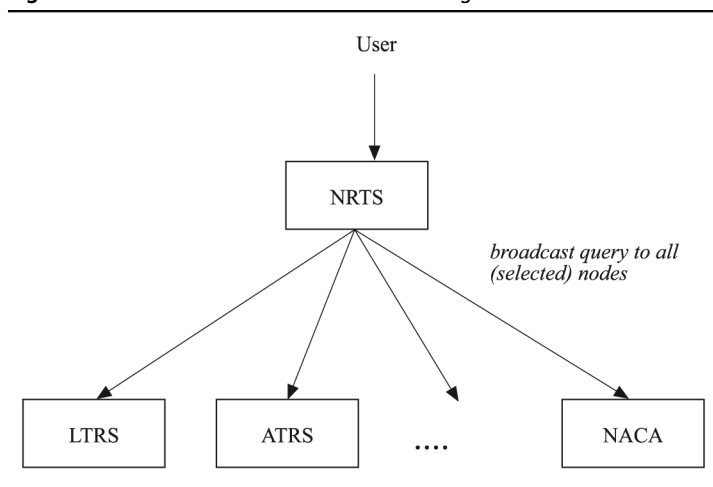

## Adopting the OAI-PMH to existing NASA DLs

NASA was one of the original participants in the OAI. For the Universal Preprint Service (UPS) demonstration project that led to the creation of the OAI (Van de Sompel *et al.*, 2000), NASA contributed the metadata from the National Advisory Committee for Aeronautics (NACA) digital library. The NACA digital library is a retrospective digitization project that focuses on the capture and preservation of the reports authored by NASA's predecessor organization during 1917-1958 (Nelson, 1999)[3]. In late 2001,

Figure 2 Screen capture of the distributed searching NTRS




both LTRS and NACA had OAI-PMH interfaces available for harvesting. This allowed the content in both collections to be indexed by a variety of OAI service providers While LTRS and NACA had previously been crawled by Web crawlers and thus had their contents available from general search engines (e.g. Google, AltaVista, AskJeeves, etc.), the OAI-PMH interface was the first time that these DLs were truly interoperable with generalized services.

Adding OAI-PMH interfaces to the existing DLs took only a few days of programming for each interface. In fact, after a generalized approach was developed, several OAI-PMH interfaces for other nodes in NTRS were developed by the authors and distributed in less than a day. The approach used in these implementations was to add a modified "bucket" to the DLs. Buckets are object-oriented, intelligent Web storage units

that contain metadata, data and methods to operate on the metadata and data (Nelson and Maly, 2001). Buckets already implement approximately 30 methods (or "verbs" in OAI-PMH parlance), so adding the six OAI-PMH verbs as bucket methods was easily accomplished. Buckets were originally built to hold full-text content in DLs, but they have proved useful in other scenarios as well, including building OAI-PMH repositories. Figure 3 shows the architecture of the modified bucket. The six OAI-PMH verbs are added to the "package" that contains the other bucket methods. These OAI-PMH verbs are implemented generically; they depend on a library file that maps the general implementations of the OAI-PMH verbs to the explicit DL. For example, it is in this file where native metadata formats are mapped to Dublin Core, rules for constructing identifiers are kept, and the appropriate file system or

**Figure 3** Architecture of an OAI-PMH bucket

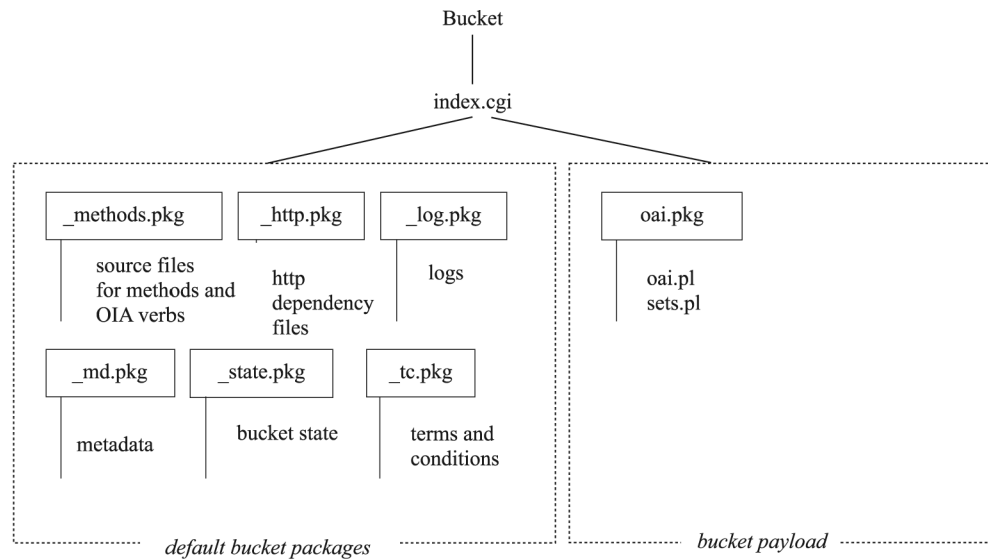

SQL calls are defined to extract the necessary metadata.

Table I is a list of all the OAI-PMH repositories built using modified buckets. The Open Video Project (Slaughter *et al.*, 2000) is not a NASA project, but they have adopted a bucket-based OAI-PMH interface and it is included in the table for comparison purposes.

LTRS and NACA currently see a great deal of OAI-PMH harvesting activity. Some of this is surely due to spikes of harvesting and testing as new SPs become active. However, the breadth of activity (over 20 distinct harvesters have visited LTRS and NACA) indicates significant acceptance of OAI-PMH interfaces for these DLs. These DLs still see the same amount of traffic from interactive users and regular Web crawlers, but the OAI-PMH capabilities result in even more exposure for their contents.

### An OAI-PMH version of NTRS

OAI-PMH use in NASA DLs has not been limited to retrofitting existing DLs. New services are being developed and existing services recreated using OAI-PMH as a core technology. One of the DLs being recreated using OAI-PMH is NTRS, which is in the final stages of internal testing at the time of this writing[4]. Many of the limitations of the current distributed searching version of NTRS are being addressed by the OAI metadata harvesting version of NTRS. While the scale of the new NTRS is much smaller (currently only about 12,000 full text documents), it is expected to grow to be equivalent with the earlier, distributed searching version of NTRS as more NASA centers and institutes become OAI-PMH capable. For example, the NASA Jet Propulsion Laboratory (JPL) is not currently a participant in the OAI-PMH version of NTRS, but will be in

**Table I** OAI-PMH interfaces built with buckets

Name	URL	Notes
Langley Technical Report Server	<a href="http://techreports.larc.nasa.gov/ltrs/oai/">http://techreports.larc.nasa.gov/ltrs/oai/</a> (1.1) <a href="http://techreports.larc.nasa.gov/ltrs/oai2.0/">http://techreports.larc.nasa.gov/ltrs/oai2.0/</a> (2.0)	Metadata in refer format; stored on a file system
NACA	<a href="http://naca.larc.nasa.gov/oai/">http://naca.larc.nasa.gov/oai/</a> (1.1) <a href="http://naca.larc.nasa.gov/oai2.0/">http://naca.larc.nasa.gov/oai2.0/</a> (2.0)	Metadata in refer format; stored on a file system
Johson Space Center Technical Report Server	<a href="http://ston.jsc.nasa.gov/JSCTRS/oai/">http://ston.jsc.nasa.gov/JSCTRS/oai/</a> (1.1)	Metadata in a COSATI derivative; stored in a MS
Open Video Project	<a href="http://www.open-video.org/oai/">http://www.open-video.org/oai/</a> (1.1) <a href="http://www.open-video.org/oai2.0/">http://www.open-video.org/oai2.0/</a> (2.0)	Metadata in a locally defined format; stored in MySQL

the near future. At the moment, JPL is re-engineering its knowledge management processes and using OAI-PMH as a core technology for this purpose. When this project is complete, an OAI-PMH interface for its technical publications (suitable for public use in NTRS) will be a small subset of JPL's institutional OAI-PMH deployment. Other centers, such as the NASA Marshall Space Flight Center (MSFC) are planning to replace their current DL infrastructure with off-the-shelf OAI-PMH capable DLs such as eprints.org[5].

The new NTRS offers many advantages that the earlier, distributed searching NTRS does not. For one, all the contents of NTRS are now searched by default. In the previous version of NTRS, not all nodes were searched by default because searching all nodes is "expensive" in terms of network resources. Furthermore, many of the nodes are highly specialized and are less likely to produce interesting results for the general query. In an attempt to limit the penalty of network access to nodes that are not likely to produce interesting results, only six of the 20 nodes selected by default. Of course, depending on knowledgeable users to target their searches correctly to the right nodes is an unrealistic assumption made by the previous NTRS version. However, this is not an issue in the new version of NTRS because metadata harvesting means maintaining a copy of metadata harvested in batch mode and not having to search each node dynamically for every query. This results in faster, more reliable searches for users. NTRS currently does not cache copies of full-text documents, so full-text document availability is still subject to transient network errors. The new version of NTRS provides both a simple interface (Figure 4) and an advanced search interface (Figure 5) that allows more targeted searching, including limiting the number of repositories to search. Syntactic differences between the 20 nodes of the previous version of NTRS made it infeasible to offer anything beyond just a simple search interface.

One interesting feature now offered by the OAI-PMH version of NTRS is that of "hierarchical harvesting" of the kind first introduced by Arc (Liu *et al.*, 2001). Hierarchical harvesting is gaining popularity as OAI-PMH aggregators harvest metadata from data providers and re-expose the metadata to other harvesters, perhaps with some metadata


normalization or cleansing. This means that NTRS can re-export its contents and act as an aggregator of public NASA STI. For example, the Elsevier sponsored OAI SP, Scirus, currently harvests both LTRS and NACA as separate repositories, even though they belong to a larger logical grouping. However, once the OAI-PMH version of NTRS is online, Scirus will be able to harvest a single NASA repository and have the entirety of the harvestable public NASA STI. Similarly, we are in discussions with the science.gov effort and hope to demonstrate the feasibility of an OAI-PMH hierarchical harvesting approach for their project. Hierarchical harvesting is a powerful capability that will make the OAI-PMH flexible enough to allow DLs to adapt to organizational structures. Guidelines for hierarchical harvest (known as "aggregators" in OAI-PMH parlance) can be found in Lagoze *et al.* (2002b).

The new NTRS is itself a modified bucket, much like an extension of the OAI-PMH interfaces for LTRS and NACA presented above. The NTRS bucket has the standard bucket methods, the OAI-PMH verbs (for hierarchical harvesting), and a set of NTRS specific verbs to correspond to simple and advanced search interfaces, and the actual searching functions. Figure 6 illustrates the architecture of the NTRS bucket. The metadata for NTRS is harvested using the harvester developed as part of the Open Digital Library Project at Virginia Tech (Suleman and Fox, 2001). The metadata is stored on a file system in its harvested form, then a locally developed Perl script loads the metadata into a MySQL database. Currently, only Dublin Core metadata (Weibel and Lagoze, 1997) is harvested from the participating nodes.

### Technical Report Interchange (TRI) Project

An example of a new DL project made possible through the OAI-PMH is the Technical Report Interchange (TRI) Project joint with NASA Langley Research Center, the Air Force Research Laboratory (AFRL), Sandia National Laboratory and Los Alamos National Laboratory (LANL). The purpose of the TRI project is to allow a targeted metadata harvesting between and only between known participants. The goal is to allow

Figure 4 Simple search interface of the new OAI-PMH NTRS

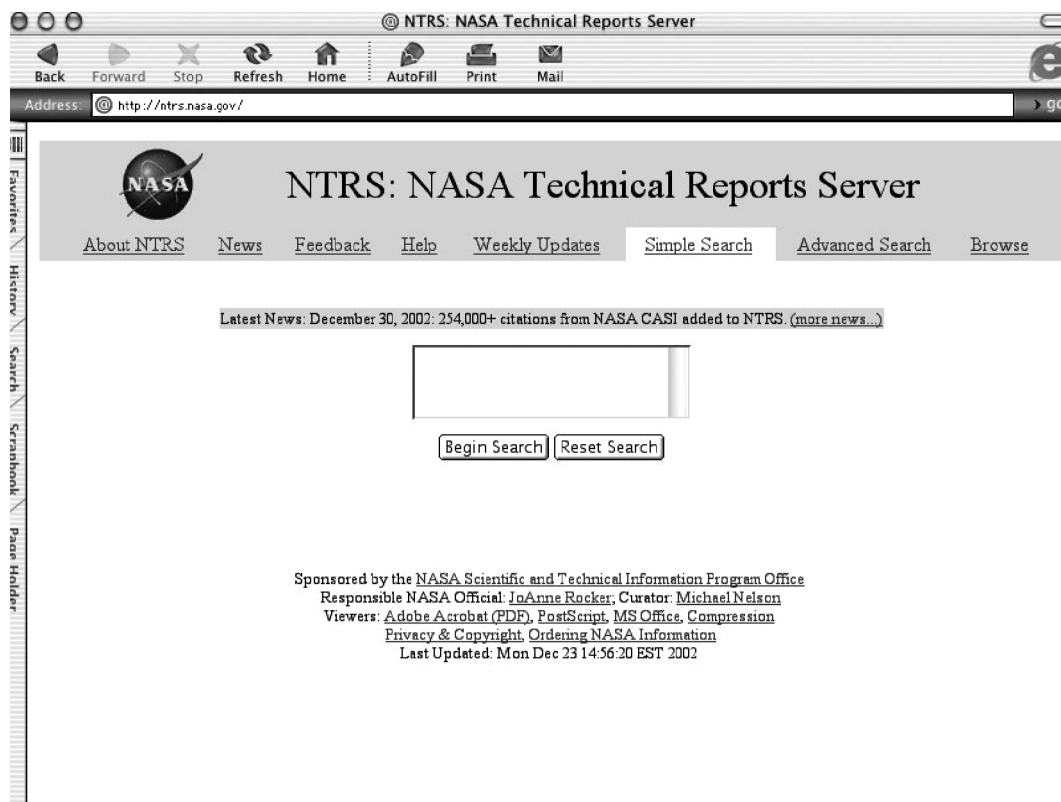

each site to maintain its existing DL infrastructure, but also allow each site to export its holdings in the standard OAI-PMH fashion as well as import from the other sites into the native DL. This is different from most OAI-PMH applications to date in that while existing data providers are given OAI-PMH interfaces, most of the SPs represent entirely new DLs or search interfaces. Table II (from Liu *et al.* (2002)) shows the established systems and formats at each of the laboratories. COSATI is the metadata format defined by the Committee on Scientific and Technical Information.

Given the heterogeneity, cost and inertia of the installed base(s), it is clear that each laboratory is not going to scrap their existing DL and standardize on a new DL system. Thus, the TRI participants setup cooperating OAI-PMH caches at each of the sites and do a complete harvest of all other TRI participants. A TRI package, which can work with either Oracle or MySQL, is distributed to each site and includes the following:

- an OAI-compliant repository (Java source code);

- code to convert organizational metadata from its native format to Dublin Core;
- code to convert Dublin Core metadata back into native metadata format;
- harvesting code;
- harvesting scheduler code; and
- log files to track when a site harvests or has been harvested.

The TRI system is in the early stages of deployment at the time of this writing. However, it demonstrates the ability to use the OAI-PMH in environments other than the broad "communication with strangers" paradigm. The TRI project can be best described as "communication between friends." This is the first stage in community building, and the standards, formats and conventions that arise from community building are the keys to building high quality DLs.

### OAI-PMH enhanced capabilities

OAI-PMH allows certain activities to be done more easily. For example, the NASA STI

Figure 5 Advanced search screen of the OAI-PMH NTRS

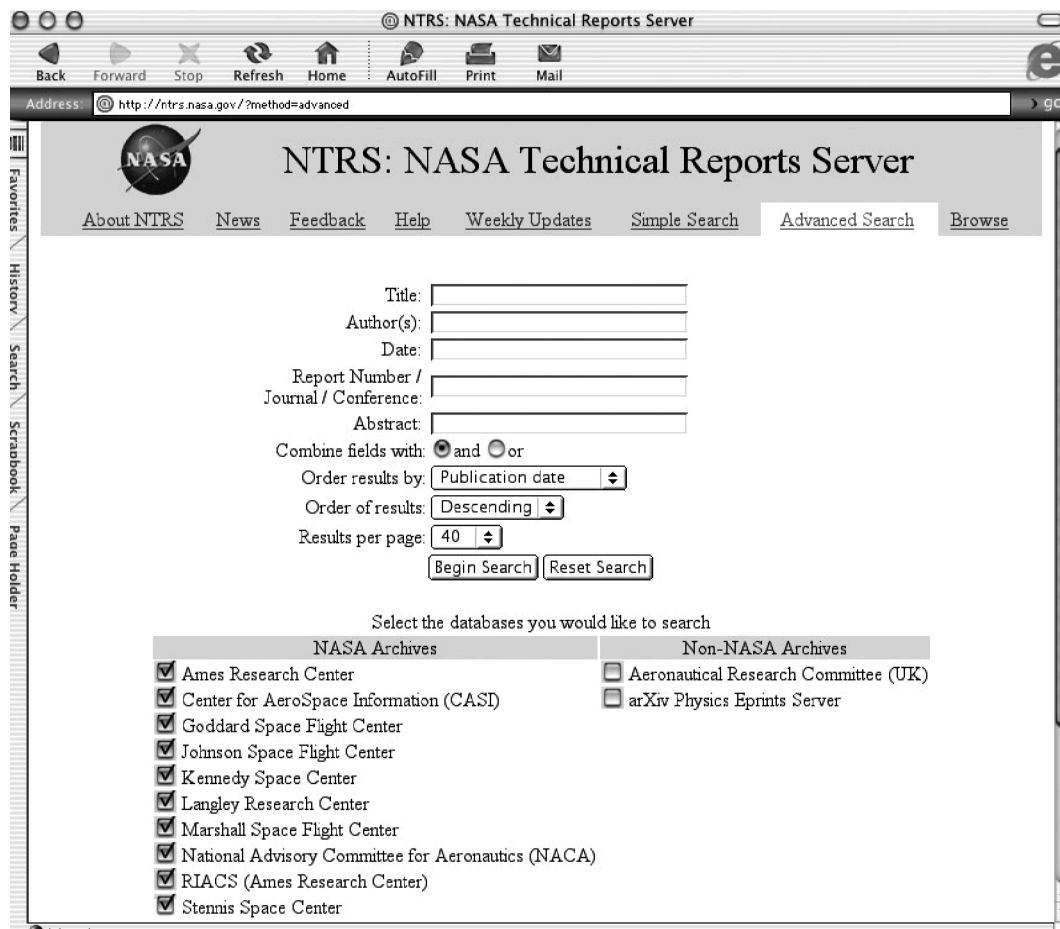


Figure 6 Architecture of the NTRS bucket

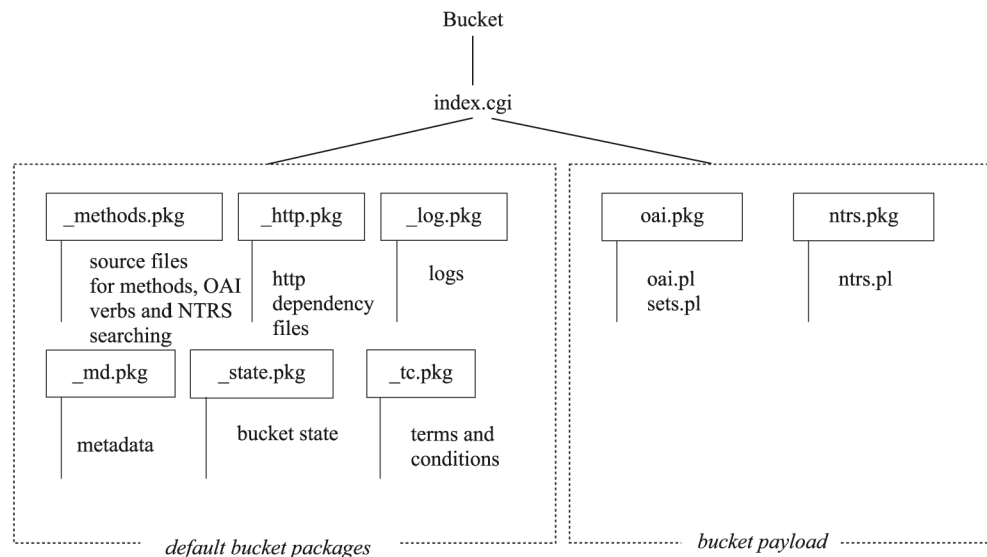




Table II Native DL systems and formats

Laboratory	Native format	Metadata	Native commercial system	Source DL	Native commercial system	Destination DL
LaRC	MARC		BASIS+		(TBD)	
LANL	MARC + local fields		Geac ADVANCE		Science Server	
AFRL	COSATI		Sirsi STILAS		Sirsi STILAS	
Sandia	MARC		Horizon		Verity	

Program Office and the MAGiC grey literature project in the UK (Sidwell *et al.*, 2000) mirror each other's content[6]. MAGiC makes a mirror of the metadata and full-text documents of NACA, and we do the same for their Aeronautic Research Committee (ARC) reports (the ARC report series is the UK equivalent to the NACA report series). Although the OAI-PMH does not explicitly address the harvesting of full text documents, we learn of reports becoming available online (as each organization scans its back catalog) as they appear in their respective OAI-PMH interfaces. At that point, each organization simply caches a copy of the full-text document listed in the DC "identifier" field. For the ARC reports, the PDFs are exposed explicitly. For the NACA reports, the PDFs are not exposed explicitly, but there is a simple heuristic for extracting the direct URL of the NACA PDF. While this approach of using OAI-PMH has a chance of missing updates (updates to the PDFs not reflected in the metadata updates will be missed), this is considered to be a rare situation in practice and the associated risk to be worth the ease of mirroring with OAI-PMH.

Another upgraded capability afforded by the OAI-PMH involves Web crawlers. Although we are unaware of any general Web crawlers that issue OAI-PMH harvesting requests, there is a gateway mechanism to assist general Web crawlers in extracting the "deep" or "hidden" Web residing in OAI repositories. DP9 is a gateway between general Web crawlers and OAI repositories (Liu *et al.*, 2002)[7]. Crawlers starting at DP9 will see a succession of HTML pages (created with the ListIdentifiers verb) that point to individual records (through a GetRecord verb). The pages are rendered in minimal HTML from their XML source for the Web crawler's benefit. resumptionTokens perform a type of pagination for the Web crawler, allowing it to step through the repository *n* records at a time. People use

general search engines such as Google for a variety of needs: one study of the popular computer science DL ResearchIndex found that only 6 per cent of the sessions with ResearchIndex began from the ResearchIndex interface itself (Mahoui and Cunningham, 2001).

### Future work

Obviously, increasing the number of NASA OAI repositories as well as increasing the content available in the existing repositories is the first order of business. OAI-PMH is driven by critical mass, and increased breadth and depth is necessary. However, beyond simply increasing participation, there are a number of interesting projects that the OAI-PMH is making possible that have not yet been undertaken. Specifically, the full power and expressiveness that OAI-PMH 2.0 offers through various optional features is not fully exploited in the current NASA DLs. Part of the issue is waiting for various harvester implementations to take advantage of these features as well. For example, although we do employ the "friends" capability to allow NASA repositories to "point" to other affiliated repositories, we are not aware of any harvesters that utilize this. As the number of data providers grows beyond what centralized registries can handle, we expect the friends container to become increasingly useful in identifying pockets of affiliated DLs.

Some new to 2.0 capabilities that we do not yet utilize include response compression, which allows far more efficient communication between the harvester and repository by compressing the wordy and often redundant text of XML and bibliographic formats. Another area involves the optional "branding" containers, which allow a repository to recommend to harvesters how to render the

harvested XML, and whether or not to attach a logo or text to the link to identify its "brand". We expect this to be useful; with Scirus[8] and OAI-PMH 1.1 we had to have these discussions via e-mail. The branding containers will automate this negotiation.

The current NASA repositories only support DC. While unqualified DC is useful for baseline interoperability, it is not rich enough to express many of the concepts that are relevant to NASA publications. We did not initially focus on exporting MARC or COSATI because we did not believe there was enough interest in these formats to warrant a higher priority. However, this is no longer the case and we must address exporting semantically richer metadata formats.

## Conclusions

The NASA STI program has the responsibility for the collection, processing, dissemination, and stewardship of NASA scientific and technical information. Since 1993, Web-based digital libraries have been an integral part of this mission. However, as useful as these DLs are, the ability to interoperate with other US governmental institutions, universities and other partners has always been limited to custom, one-off solutions. The OAI-PMH offers a simple, general interoperability framework for DLs and other Web-based services. The OAI-PMH has been added to existing DLs, such as LTRS and NACA, and has been the catalyst for re-implementing DLs such as NTRS. Not only does the new NTRS move away from the distributed searching model in favor of the metadata harvesting model, but NTRS creates new capabilities, such as providing a single point of harvesting NASA STI for other commercial and governmental projects.

Furthermore, we are just reaching the stage of implementing new projects with the capability of OAI-PMH. This includes the TRI project, which uses OAI caches to synchronize the holdings of native DLs. Also, we are using the OAI-PMH/Web gateway, DP9, to make our collections available to general Web crawlers, and are beginning to use the OAI-PMH as the core technology for mirroring agreements.

The OAI-PMH represents a significant development in DL interoperability. The move from the spiraling complexity of distributed searching models to the simplicity of a metadata harvesting model has created a flurry of DL development. The number of OAI-PMH enabled DLs, harvesters, metadata converters and similar tools continues to grow at a monthly rate. The OAI is just reaching the point of critical mass, both in terms of contents and repositories, and also in OAI-PMH capable staff and tools. Soon, OAI-PMH will be just another core DL technology such as http or XML.

## Notes

- 1 Langley technical report server, <http://techreports.larc.nasa.gov/ltrs/>
- 2 NASA technical report server (old), <http://techreports.larc.nasa.gov/cgi-bin/NTRS>
- 3 NACA, <http://naca.larc.nasa.gov/>
- 4 NASA technical report server (new), <http://ntrs.nasa.gov/>
- 5 DP9, <http://dlib.cs.odu.edu/dp9/>
- 6 Eprints.org, <http://www.eprints.org/>
- 7 MAGiC, [www.magic.ac.uk/](http://www.magic.ac.uk/)
- 8 Scirus, [www.scirus.com/](http://www.scirus.com/)

## References

- Kahle, B., Morris, H., Davis, F., Tienne, K., Hart, C. and Palmer, R. (1992), "Wide area information servers: an executive information system for unstructured files", *Electronic Networking: Research, Applications and Policy*, Vol. 2 No. 1, pp. 59-68.
- Kurtz, M.J., Eichorn, G., Accomazzi, A., Grant, C.S., Demleitner, M. and Murray, S.S. (1999), "The NASA ADS abstract service and the distributed astronomy digital library", *D-Lib Magazine*, Vol. 5 No. 11, available at: [www.dlib.org/dlib/november99/11kurtz.html](http://www.dlib.org/dlib/november99/11kurtz.html)
- Lagoze, C.L. and Van de Sompel, H. (2001), "The Open Archives Initiative: building a low barrier interoperability framework", *Proceedings of the 1st ACM/IEEE Joint Conference on Digital Libraries*, pp. 54-62, available at: [www.openarchives.org/documents/oai.pdf](http://www.openarchives.org/documents/oai.pdf)
- Lagoze, C.L., Van de Sompel, H., Nelson, M.L. and Warner, S. (2002a), "Open Archives Initiative Protocol for Metadata Harvesting – version 2.0", available at: [www.openarchives.org/OAI/openarchivesprotocol.html](http://www.openarchives.org/OAI/openarchivesprotocol.html)
- Lagoze, C.L., Van de Sompel, H., Nelson, M.L. and Warner, S. (2002b), "Open Archives Initiative Protocol for

- Metadata Harvesting implementation guidelines", available at: [www.openarchives.org/OAI/2.0/guidelines.htm](http://www.openarchives.org/OAI/2.0/guidelines.htm)
- Liu, X., Maly, K., Zubair, M. and Nelson, M.L. (2001), "Arc: an OAI service provider for digital library federation", *D-Lib Magazine*, Vol. 7 No. 4, available at: [www.dlib.org/dlib/april01/liu04liu.html](http://www.dlib.org/dlib/april01/liu04liu.html)
- Liu, X., Maly, K., Zubair, M., Tang, R., Padshah, M., Roncaglia, R., Rocker, J., Nelson, M., von Ofenheim, W., Luce, R., Stack, J., Knudson, F., Goldsmith, B., Holtkamp, I., Blake, M., Carter, J., Di Giacomo, M., Nutter, J., Brown, S., Montbrand, R., Landenberger, S., Pierson, K., Duran, V. and Moser, B. (2002), "Technical report interchange through synchronized OAI caches", *Proceedings of the 6th European Conference on Digital Libraries*, pp. 176-89.
- Lynch, C.A. (1997), "The Z39.50 information retrieval standard", *D-Lib Magazine*, Vol. 3 No. 4, available at: [www.dlib.org/dlib/april97/04lynch.html](http://www.dlib.org/dlib/april97/04lynch.html)
- Lynch, C.A. (2001), "Metadata Harvesting and the Open Archives Initiative", *ARL Bimonthly Report*, No. 217, available at: [www.arl.org/newsltr/217/mhp.html](http://www.arl.org/newsltr/217/mhp.html)
- Mahoui, M. and Cunningham, S. (2001), "Search behavior in a research-oriented digital library", *Proceedings of the 5th European Conference on Digital Libraries*, pp. 13-24.
- Nelson, M.L. (1999), "A digital library for the National Advisory Committee for Aeronautics", *NASA/TM-1999-209127*, available at: <http://techreports.larc.nasa.gov/ltrs/PDF/1999/tm/NASA-99-tm209127.pdf>
- Nelson, M.L. (2001), "Better interoperability through the Open Archives Initiative", *New Review of Information Networking*, Vol. 7, pp. 133-45.
- Nelson, M.L. and Gottlich, G.L. (1994), "Electronic document distribution: design of the anonymous FTP Langley technical report server", *NASA TM-4567*, available at: <http://techreports.larc.nasa.gov/ltrs/PDF/tm4567.pdf>
- Nelson, M.L. and Maly, K. (2001) "Buckets: smart objects for digital libraries", *Communications of the ACM*, Vol. 44 No. 5, pp. 60-2.
- Nelson, M.L., Gottlich, G.L. and Bianco, D.J. (1994), "World Wide Web implementation of the Langley technical report server", *NASA TM-109162*, available at: <http://techreports.larc.nasa.gov/ltrs/PDF/tm109162.pdf>
- Nelson, M.L., Gottlich, G.L., Bianco, D.J., Paulson, S.S., Binkley, R.L., Kellogg, Y.D., Beaumont, C.J., Schmunk, R.B., Kurtz, M.J., Accomazzi, A. and Syed, O. (1995), "The NASA technical report server", *Internet Research: Electronic Network Applications and Policy*, Vol. 5 No. 2, pp. 25-36, available at: <http://techreports.larc.nasa.gov/ltrs/papers/NASA-95-ir-p25/NASA-95-ir-p25.html>
- Pinelli, T.E. (1990), "Introduction to National Aeronautics and Space Administration's scientific and technical information program", *Government Information Quarterly*, Vol. 7 No. 2, pp. 123-6.
- Powell, A.L. and French, J.C. (2000), "Growth and server availability for the NCSTRL digital library", *Proceedings of the 5th ACM Conference on Digital Libraries*, pp. 264-5.
- Roper, D.G., McCaskill, M.K., Holland, S.D., Walsh, J.L., Nelson, M.L., Adkins, S.L., Ambur, M.Y. and Campbell, B.A. (1994), "A strategy for electronic dissemination of NASA Langley publication", *NASA TM-109172*, available at: <http://techreports.larc.nasa.gov/ltrs/PDF/tm109172.pdf>
- Sidwell, C.A., Needham, P.A.S. and Harrington, J.D. (2000), "Lightening grey literature: making the invisible visible", *New Review of Information Networking*, Vol. 6, pp. 121-36.
- Slaughter, L., Marchionini, G. and Geisler, G. (2000), "Open video: a framework for a test collection", *Journal of Network and Computer Applications*, Vol. 23 No. 3, pp. 219-45.
- Suleman, H. and Fox, E.A. (2001), "A framework for building open digital libraries", *D-Lib Magazine*, Vol. 7 No. 12, available at: [www.dlib.org/dlib/december01/suleman/12suleman.html](http://www.dlib.org/dlib/december01/suleman/12suleman.html)
- Van de Sompel, H. and Lagoze, C. (2000), "The Santa Fe Convention of the Open Archives Initiative", *D-Lib Magazine*, Vol. 6 No. 2, available at: [www.dlib.org/dlib/february00/vandesompel-oai/02vandesompel-oai.html](http://www.dlib.org/dlib/february00/vandesompel-oai/02vandesompel-oai.html)
- Van de Sompel, H. and Lagoze, C. (2002), "Notes from the interoperability front: a progress report on the Open Archives Initiative", *Proceedings of the 6th European Conference on Digital Libraries*, pp. 144-57, available at: [www.openarchives.org/documents/ecdl-oai.pdf](http://www.openarchives.org/documents/ecdl-oai.pdf)
- Van de Sompel, H., Krichel, T., Nelson, M.L., Hochstenbach, P., Lyapunov, V.M., Maly, K., Zubair, M., Kholief, M., Liu, X. and O'Connell, H. (2000), "The UPS prototype: an experimental end-user service across e-print archives", *D-Lib Magazine*, Vol. 6 No. 2, available at: [www.dlib.org/dlib/february00/vandesompel-ups/02vandesompel-ups.html](http://www.dlib.org/dlib/february00/vandesompel-ups/02vandesompel-ups.html)
- Weibel, S. and Lagoze, C. (1997), "An element set to support resource discovery – the state of the Dublin Core", *International Journal on Digital Libraries*, Vol. 1 No. 2, pp. 176-86.