

System Testing

Steven J Zeil

April 9, 2013

Contents

1	Test Coverage	3
1.1	Coverage Measures	3

1.1.1	Black-Box Testing	3
1.1.2	White-Box Testing	7
1.2	C/C++ - gcov	26
1.3	Java	50
2	Oracles	70
2.1	expect	71
2.2	*Unit	71
2.3	GUI systems	73
2.4	Web systems	76
2.5	Selenium	78



1 Test Coverage

1.1 Coverage Measures

1.1.1 Black-Box Testing

Black-Box Testing

Black-box (a.k.a. *specification-based*) testing chooses tests without consulting the implementation.

- Equivalence partitioning
- Boundary-value testing
- Special-values testing

.....



Equivalence Partitioning

(a.k.a *functional testing*)

- Attempt to choose test data illustrating each distinct behavior or each distinct class of inputs and outputs at least once.
 - e.g., each kind of transaction, each kind of report
- Can be driven by function points.

.....

Boundary-Values Testing

Choose data at the boundaries of a functional testing class or of the overall input domain.



- check amount = 0
- check amount \geq \$1,000,000
- transaction date = day before bank was founded
- transaction date 100 years in future
- name string empty
- name string one less than full
- name string full
- name string overfull

.....



Special-Values Testing

Choose data reflecting “special” or troublesome cases.

Examples include choosing for

- each numeric input
 - negative,
 - zero, and
 - positive values,
- each string input
 - empty
 - entirely blank strings,



etc.

.....

1.1.2 White-Box Testing

White-Box Testing

White-Box (a.k.a. *Implementation-based* testing) uses information from the implementation to choose tests.

- Structural Testing (a.k.a., “path testing” (not per your text)

Designate a set of paths through the program that must be exercised during testing.

- Statement Coverage



- Branch Coverage
 - Cyclomatic coverage (“independent path testing”)
 - Data-flow Coverage
- Mutation testing

.....

Statement Coverage

Require that every statement in the code be executed at least once during testing.

- Needs software tools to monitor this requirement for you.
 - e.g., **gcov** in Unix for C, C++

.....



Statement Coverage Example

```
cin >> x >> y;  
while (x > y)  
  {  
    if (x > 0)  
      cout << x;  
    x = f(x, y);  
  }  
cout << x;
```

What kinds of tests are required for statement coverage?

.....

Branch Coverage

Requires that every "branch" in the flowchart be tested at least once



- Equivalent to saying that each conditional stmt must be tested as both true and false
- Branch coverage implies Statement Coverage, but not vice versa

```
if (X < 0)
  X = -X;
Y = sqrt(X);
```

.....

Branch Coverage Example

```
cin >> x >> y;
while (x > y)
{
```



```
    if (x > 0)
        cout << x;
    x = f(x, y);
}
cout << x;
```

What kinds of tests are required for branch coverage?

.....

Variations on Branch Coverage

- *Path coverage* seeks to cover each path from start to finish through the program.
 - Infeasible (why?)
- Loop coverage: various rules such as



A loop is covered if, in at least one test, the body was executed 0 times, and if in some test the body was executed exactly once, and if in some test the body was executed more than once.

.....

Multi-Condition Coverage

a.k.a., Condition coverage

- Various approaches to coping with boolean expressions, particularly short-circuited ones.
- Goal: given a boolean expression $a \oplus b$, where \oplus could be $\&$, $\&\&$, $|$, etc., need at least one test where



- a is true and, had it been false, the value of $a \oplus b$ would change
 - a is false and, had it been true, the value of $a \oplus b$ would change
 - b is true and, had it been false, the value of $a \oplus b$ would change
 - b is false and, had it been true, the value of $a \oplus b$ would change
- For example, for the expression $a \& b$, we would need th combinations

a	b
true	true
false	true
true	false

.....




Cyclomatic Coverage



(a.k.a “independent path coverage”, “path testing”)


- The latter term (used in your text) should be discouraged as it is both vague and means something entirely different to most of the testing community
- Each independent path must be tested
 - An *independent path* is one that includes a branch not previously taken.

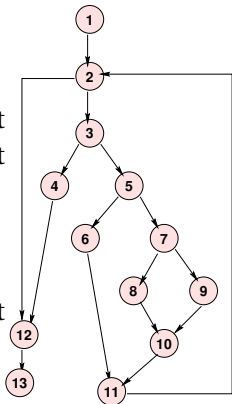

.....

Cyclomatic Example



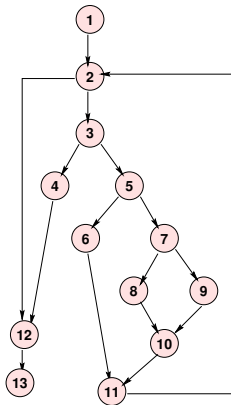

What are the independent paths?

One set:

1, 2, 3, 4, 12, 13

1, 2, 3, 5, 6, 11, 2, 12, 13

1, 2, 3, 5, 7, 8, 10, 11, 2, 12, 13

1, 2, 3, 5, 7, 9, 10, 11, 2, 12, 13

.....

Cyclomatic Complexity



The number of independent paths in a program can be discovered by computing the cyclomatic complexity (McCabe, 1976) ...

$$CC(G) = \text{Number}(\text{edges}) - \text{Number}(\text{nodes}) + 1$$

- This is a popular metric for module complexity.
- Actually pretty trivial: for structured programs with only binary decision constructs, equals number of conditional statements + 1
- relation to testing is dubious
 - simply branch coverage hidden behind smoke and mirrors

.....



Issues

- Sets of independent paths are not unique, nor is their size:




1,2,3,5,6,11,
2,3,5,7,8,
10,11,2,3,
5,7,9,10,11,
2,12,13

1,2,3,4,12,13

.....

Data-Flow Coverage

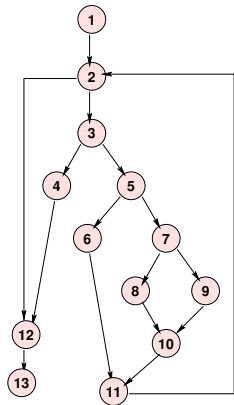

Attempts to test significant combinations of branches.

- Any stmt i where a variable X may be assigned a new value is called a *definition* of X at i : $def(X,i)$
 - Any stmt i where a variable X may be used/retrieved is called a *reference* or *use* of X at i : $ref(X,i)$
-

Def-Clear Paths

- A path from stmt i to stmt j is *def-clear with respect to X* if it contains no definitions of X except possibly at the beginning (i) and end (j)
-



all-defs

The *all-defs* criterion requires that each definition $\text{def}(X, i)$ be tested some def-clear path to some reference $\text{ref}(X, j)$.

```
1:  cin >> x >> y;           // d(x,1) d(y,1)
2:  while (x > y)             // r(x,2), r(y,2)
3:  {
4:      if (x > 0)             // r(x,4)
5:          cout << x;         // r(x,5)
6:      x = f(x, y);           // r(x,6), r(y,6), d(x,6)
7:  }
8:  cout << x;                 // r(x,8)
```

What kinds of tests are required for all-defs coverage?

.....



all-uses

The *all-uses* criterion requires that each pair $(\text{def}(X, i), \text{ref}(X, j))$ be tested using some def-clear path from i to j .

```
1:  cin >> x >> y;           // d(x,1) d(y,1)
2:  while (x > y)             // r(x,2), r(y,2)
3:  {
4:      if (x > 0)             // r(x,4)
5:          cout << x;         // r(x,5)
6:      x = f(x, y);           // r(x,6), r(y,6), d(x,6)
7:  }
8:  cout << x;                 // r(x,8)
```

What kinds of tests are required for all-uses coverage?

.....



Mutation Testing

Given a program P ,

- Form a set of *mutant* programs that differ from P by some single change
- These changes (called *mutation operators*) include:
 - exchanging one variable name by another
 - altering a numeric constant by some small amount
 - exchanging one arithmetic operator by another
 - exchanging one relational operator by another
 - deleting an entire statement
 - replacing an entire statement by an abort () call

.....



Mutation Testing (cont.)

- Run P and each mutant P_i on a previously chosen set of tests
- Compare the output of each P_i to that of P
 - If the outputs differ on any test, P_i is *killed* and removed from the set of mutant programs
 - If the outputs are the same on all tests, P_i is still considered *alive*.

.....

Mutation Testing (cont.)

A set of test data is considered *inadequate* if it cannot distinguish between the program as written (P) and programs that differ from it by only a simple change.



- So if any mutants are still alive after running a set of tests, we augment the tests until we can kill all the mutants.

.....

Mutation Testing Problems

- Even simple programs yield tens of thousands of mutants. Executing these is time-consuming.
 - But most are killed on first few tests
 - And the process *is* automated



- Some mutants are actually *equivalent* to the original program:

<code>X = Y;</code>	<code>X = Y</code>
<code>if (X > 0)</code>	<code>if (Y</code>
<code>⋮</code>	<code>⋮</code>
- Identifying these can be difficult (and cannot be automated)

.....

1.2 C/C++ - gcov

Monitoring Statement Coverage with gcov

- coverage tool includes with the GNU compiler suite (**gcc**, **g++**, etc.)
- As an example, look at testing the three search functions in



```
#ifndef ARRAYUTILS_H
#define ARRAYUTILS_H

// Add to the end
// - Assumes that we have a separate integer (size) indicating how
//   many elements are in the array
// - and that the "true" size of the array is at least one larger
//   than the current value of that counter
template <typename T>
void addToEnd (T* array, int& size, T value)
{
    array[size] = value;
}
```



```
    ++size;
}

// Add value into array[index], shifting all elements already in
//   index..size-1 up one, to make room.
// - Assumes that we have a separate integer (size) indicating h
//   many elements are in the array
// - and that the "true" size of the array is at least one large
//   than the current value of that counter

template <typename T>
void addElement (T* array, int& size, int index, T value)
```



```
{  
    // Make room for the insertion  
    int toBeMoved = size - 1;  
    while (toBeMoved >= index) {  
        array[toBeMoved+1] = array[toBeMoved];  
        --toBeMoved;  
    }  
    // Insert the new value  
    array[index] = value;  
    ++size;  
}  
  
// Assume the elements of the array are already in order
```



```
// Find the position where value could be added to keep  
//   everything in order, and insert it there.  
// Return the position where it was inserted  
// - Assumes that we have a separate integer (size) indicating h  
//   many elements are in the array  
// - and that the "true" size of the array is at least one large  
//   than the current value of that counter
```

```
template <typename T>  
int addInOrder (T* array, int& size, T value)  
{  
    // Make room for the insertion  
    int toBeMoved = size - 1;  
    while (toBeMoved >= 0 && value < array[toBeMoved]) {
```



```
    array[toBeMoved+1] = array[toBeMoved];
    --toBeMoved;
}
// Insert the new value
array[toBeMoved+1] = value;
++size;
return toBeMoved+1;
}

// Search an array for a given value, returning the index where
// found or -1 if not found.
template <typename T>
int seqSearch(const T list[], int listLength, T searchItem)
```



```
{  
    int loc;  
  
    for (loc = 0; loc < listLength; loc++)  
        if (list[loc] == searchItem)  
            return loc;  
  
    return -1;  
}
```

*// Search an ordered array for a given value, returning the index
// found or -1 if not found.*

```
template <typename T>
```




```
int seqOrderedSearch(const T list[], int listLength, T searchItem)
{
    int loc = 0;

    while (loc < listLength && list[loc] < searchItem)
    {
        ++loc;
    }
    if (loc < listLength && list[loc] == searchItem)
        return loc;
    else
        return -1;
}
```



```
// Removes an element from the indicated position in the array, m  
// all elements in higher positions down one to fill in the gap.  
template <typename T>  
void removeElement (T* array, int& size, int index)  
{  
    int toBeMoved = index + 1;  
    while (toBeMoved < size) {  
        array[toBeMoved] = array[toBeMoved+1];  
        ++toBeMoved;  
    }  
    --size;  
}
```



```
// Search an ordered array for a given value, returning the index  
// found or -1 if not found.
```

```
template <typename T>  
int binarySearch(const T list[], int listLength, T searchItem)  
{  
    int first = 0;  
    int last = listLength - 1;  
    int mid;  
  
    bool found = false;  
  
    while (first <= last && !found)
```



```
{
    mid = (first + last) / 2;

    if (list[mid] == searchItem)
        found = true;
    else
        if (searchItem < list[mid])
            last = mid - 1;
        else
            first = mid + 1;
}

if (found)
    return mid;
```



```
    else
        return -1;
}
```

```
#endif
```

- with test driver

```
#include <cassert>
#include <iostream>
#include <sstream>
```



```
#include <string>

#include "arrayUtils.h"

using namespace std;

// Unit test driver for array search functions
```



```
int main(int argc, char** argv)
{
    // Repeatedly reads tests from cin
    // Each test consists of a line containing one or more words.
    // The first word is one that we want to search for. The
    // remaining words are placed into an array and represent the c
    // we will search through.

    string line;
    getline (cin, line);
    while (cin)
    {
        istringstream in (line);
        cout << line << endl;
    }
}
```



```
string toSearchFor;
in >> toSearchFor;
int nWords = 0;
string words[100];
while (in >> words[nWords])
++nWords;

cout << seqSearch (words, nWords, toSearchFor)
    << " "
    << seqOrderedSearch (words, nWords, toSearchFor)
    << " "
    << binarySearch (words, nWords, toSearchFor)
    << endl;
```




```
    getline (cin, line);
}

return 0;
}
```

, which reads data from a text stream (e.g., standard in), uses that data to construct arrays, and invokes each function on those arrays, printing the results of each.

.....

Compiling for gcov Statement Coverage

- To use **gcov**, we compile with special options



- `-fprofile-arcs -ftest-coverage`
- When the code has been compiled, in addition to the usual files there will be several files with endings like `.gcno`
 - These hold data on where the statements and branches in our code are.

.....

Running Tests with gcov

- Run your tests normally.
- As you test, a `*.gcda` file will accumulate

.....



Viewing Your Report

- Run `gcov mainProgram`
 - The immediate output will be a report on the percentages of statements covered in each source code file.
 - Also creates a *.gcov detailed report for each source code file. e.g.,

.....

Sample Statement Coverage Report

```
–: 69:template <typename T>  
–: 70:int seqSearch(const T list [], int listLength, T searchItem)  
–: 71:{
```



```
1: 72: int loc;
-: 73:
2: 74: for (loc = 0; loc < listLength; loc++)
2: 75:     if (list[loc] == searchItem)
1: 76:         return loc;
-: 77:
#####: 78: return -1;
-: 79:}
```

- Report lists number of times each statement has been executed
 - Lists ##### if a statement has never been executed

.....



Monitoring Branch Coverage with gcov

gcov can report on branches taken.

- Just add options to the gcov command:

- `gcov -b -c mainProgram`

.....

Reading gcov Branch Info

- **gcov** reports
 - Number of times each function call successfully returned



- # of times a branch was *executed* (i.e., how many times the branch condition was evaluated)
- and # times each branch was *taken*
 - * For branch coverage, this is the relevant figure

.....

But What is a “Branch”?

- A "branch" is anything that causes the code to not continue on in straight-line fashion
 - Branch listed right after an "if" is the "branch" that jumps around the "then" part to go to the "else" part.



- && and || operators introduce their own branches
- Other branches may be hidden
 - * Contributed by calls to inline functions
 - * Or just a branch generated by the compiler's code generator
- In practice, this can be very hard to interpret

.....

Example: gcov Branch Coverage report

```
-: 84:template <typename T>  
-: 85:int seqOrderedSearch(const T list [], int listLength, T searchIt  
-: 86:{  
1: 87:    int loc = 0;
```



```
    -: 88:
    1: 89:   while (loc < listLength && list[loc] < searchItem)
branch 0 taken 0
call   1 returns 1
branch 2 taken 0
branch 3 taken 1
    -: 90:   {
#####: 91:   ++loc;
branch 0 never executed
    -: 92:   }
    1: 93:   if (loc < listLength && list[loc] == searchItem)
branch 0 taken 0
call   1 returns 1
branch 2 taken 0
    1: 94:   return loc;
```




```
branch  0 taken 1
        -:   95:   else
#####:   96:       return -1;
        -:   97:}
```

- Report is organized by *basic blocks*, straight-line sequences of code terminated by a branch or a call
- Hard to map to specific source code constructs
 - lowest-numbered branch is often the leftmost condition
 - Fact of life that compilers insert branches and calls that are often invisible to us

.....



1.3 Java

Java Coverage Tools

- Clover
- JaCoCo
 - Part of the EclEmma project (Eclipse plugin for Emma)
 - Emma, an older coverage tool, now replaced by JaCoCo

.....

Clover

- Commercial product, currently free for open-source projects



- integrates with Ant, Maven
- lots of reporting features
- Works in “traditional” coverage tool fashion
 - Requires a “fork” of the build process to build a monitoring version
 - Injects monitors into compiled code
- Test optimization: can re-run only those tests that covered changed code

.....

JaCoCo

- line and branch coverage



- Instrumentation is done on the fly
 - An “agent” monitors execution of normally compiled bytecode
 - * No special build required
- Supports full Java 7
- Works with Maven & Ant
 - In Ant, wrap normal `<java>` and `<junit>` tasks inside a `<jacoco:coverage>` element

.....



Example: JaCoCo in Ant

Working with our Code Annotation project, add a dependency on the JaCoCo library:

```
<ivy-module version="2.0">
  <info organisation="edu.odu.cs" module="codeAnnotation" revision="1.0"/>
  <publications>
    <artifact name="codeAnnotation" type="jar" ext="jar"/>
    <artifact name="codeAnnotation-src" type="source" ext="zip"/>
  </publications>
  <dependencies>
    <dependency org="de.jflex" name="jflex" rev="1.4.3"/>
    <dependency org="junit" name="junit" rev="4.10"/>
    <dependency org="org.jacoco" name="org.jacoco.ant"
      rev="latest.integration"/>
  </dependencies>
</ivy-module>
```



```
</dependencies>  
</ivy-module>
```

.....

Example: JaCoCo in Ant (cont.)

```
<project name="codeAnnotation" basedir="." default="build"  
  xmlns:ivy="antlib:org.apache.ivy.ant"  
  xmlns:jacoco="antlib:org.jacoco.ant"  
>  
  
  <record name="ant.log" action="start" append="false" />
```



```
<path id="testCompilationPath">
  <fileset dir="lib" includes="*.jar"/>
  <pathelement path="target/classes"/>
</path>

<path id="testExecutionPath">
  <fileset dir="lib" includes="*.jar"/>
  <pathelement path="target/classes"/>
  <pathelement path="target/test-classes"/>
</path>

<property name="ivy.install.version" value="2.3.0"/>
<property name="jsch.install.version" value="0.1.49"/>
```



```
<property name="ivy.jar.dir" value="${basedir}/ivy"/>
<property name="ivy.jar.file" value="${ivy.jar.dir}/ivy.jar"/>
<property name="jsch.jar.file" value="${ivy.jar.dir}/jsch.jar"/>
<property name="build.dir" value="build"/>
<property name="src.dir" value="src"/>

<target name="download-ivy" unless="skip.download">
  <mkdir dir="${ivy.jar.dir}"/>
  <echo message="installing ivy..."/>
  <get src="http://repol.maven.org/maven2/org/apache/ivy/ivy/${ivy.install.version}"
    dest="${ivy.jar.file}" usetimestamp="true"/>
</target>

<target name="download-jsch" unless="skip.download">
```




```
<mkdir dir="${ivy.jar.dir}"/>
<echo message="installing jsch..."/>
<get src="http://repo1.maven.org/maven2/com/jcraft/jsch/${jsch.install
  dest="${jsch.jar.file}" usetimestamp="true"/>
</target>

<target name="install-jsch" depends="download-jsch">
</target>

<target name="install-ivy" depends="download-ivy"
  description="--> install ivy">
  <path id="ivy.lib.path">
    <fileset dir="${ivy.jar.dir}" includes="*.jar"/>
  </path>
```



```
<taskdef resource="org/apache/ivy/ant/antlib.xml"
  uri="antlib:org.apache.ivy.ant" classpathref="ivy.lib.path"/>
</target>

<target name="resolve-ivy" depends="install-ivy,install-jsch" description="
  <ivy:retrieve/>
  <echo>ivy.default.ivy.user.dir is ${ivy.default.ivy.user.dir}</echo>
  <taskdef uri="antlib:org.jacoco.ant" resource="org/jacoco/ant/antlib.xml"
    <classpath refid="testExecutionPath"/>
  </taskdef>
  <taskdef classname="JFlex.anttask.JFlexTask" name="jflex">
    <classpath refid="testExecutionPath"/>
  </taskdef>
</target>
```



```
<target name="generateSource" depends="resolve-ivy">
  <mkdir dir="target/gen/java"/>
  <jflex file="src/main/jflex/code2html.flex"
    destdir="target/gen/java"/>
  <jflex file="src/main/jflex/code2tex.flex"
    destdir="target/gen/java"/>
  <jflex file="src/main/jflex/list2html.flex"
    destdir="target/gen/java"/>
  <jflex file="src/main/jflex/list2tex.flex"
    destdir="target/gen/java"/>
</target>
```



```
<target name="compile" depends="generateSource"> ②
  <mkdir dir="target/classes"/>
  <javac srcdir="target/gen/java" destdir="target/classes" debug="true"
    source="1.6" includeantruntime="false"/>
  <javac srcdir="src/main/java" destdir="target/classes" debug="true"
    source="1.6" includeantruntime="false"/>
</target>

<target name="compile-tests" depends="compile">
  <mkdir dir="target/test-classes"/>
  <javac srcdir="src/test/java" destdir="target/test-classes" debug="true"
    source="1.6" includeantruntime="false">
    <classpath refid="testCompilationPath"/>
  </javac>
```



```
</target>

<target name="test" depends="compile-tests">
  <mkdir dir="target/test-results/details"/>
  <jacoco:coverage destfile="target/jacoco.exec"> ③
    <junit printsummary="yes"
      haltonfailure="yes" fork="yes"
    >
  <classpath refid="testExecutionPath"/>
  <formatter type="xml"/>
  <batchtest todir="target/test-results/details">
    <fileset dir="target/test-classes">
      <include name="**/*Test*.class"/>
    </fileset>
  </batchtest>
</target>
```



```
</batchtest>
  </junit>
</jacoco:coverage>
<junitreport todir="target/test-results">
  <fileset dir="target/test-results/details">
    <include name="TEST-*.xml"/>
  </fileset>
  <report format="frames" todir="target/test-results/html"/>
</junitreport>
</target>

<target name="coverageReport" depends="test">
  <jacoco:report>
    <executiondata>
```



```
        <file file="target/jacoco.exec"/> ⑤  
    </executiondata>  
  
<structure name="Code Annotation Project"> ⑥  
    <classfiles>  
        <fileset dir="target/classes"/>  
        <fileset dir="target/test-classes"/>  
    </classfiles>  
    <sourcefiles encoding="UTF-8">  
        <fileset dir="src/main/java"/>  
        <fileset dir="src/test/java"/>  
        <fileset dir="target/gen/java"/>  
    </sourcefiles>  
    </structure>
```



```
<html destdir="target/coverageReport"/> ⑦  
  
</jacoco:report>  
</target>  
  
<target name="build" depends="coverageReport">  
  <jar destfile="codeAnnotation.jar" basedir="target/classes">  
    <manifest>  
      <attribute name="Main-Class"  
                value="edu.odu.cs.code2html.Code2HTML"/>  
    </manifest>  
  </jar>  
  <zip destfile="target/codeAnnotation-src.zip">
```




```
<fileset dir=".">
  <include name="*.xml"/>
  <include name="test.cpp"/>
  <include name="*.css.cpp"/>
  <include name="src/**/*"/>
  <exclude name="**/*~"/>
  <exclude name="target/**/*"/>
</fileset>
</zip>
</target>

<target name="publish" depends="build">
  <ivy:retrieve/>
  <ivy:publish resolver="Forge350Publish">
```



```
    status="release"  
    update="true"  
    overwrite="true"  
    publishivy="true">  
    <artifacts pattern="[artifact].[ext]"/>  
  </ivy:publish>  
</target>  
  
<target name="clean">  
  <delete dir="target"/>  
</target>  
  
<target name="cleaner" depends="clean">  
  <delete dir="lib"/>
```



```
</target>

<target name="cleanest" depends="cleaner">
  <delete dir="ivy"/>
</target>

</project>
```

- ❶ Once the dependencies are resolved, we can activate the JaCoCo tasks.
- ❷ Note that there is no change at all in compilation
- ❸ And minimal change to execution
 - Test execution must have fork="true" because



- * agent needs to be attached to the running JVM
- * (which is already running **ant**)
- In practice, I might coverage data collection a separate target

④ Preparation of reports starts here

⑤ Must match destination given when running tests

⑥ This describes the class and source code file locations

⑦ Choose report format and location

.....

Example: JaCoCo Report



- Report
 - Notice that even JFlex-generated code gets measured and included in report
 - * Though the annotated listings are missing for some reason.

.....

EclEmma

Eclipse plugin for coverage tools (JaCoCo)

- Adds a new launch mode, *Coverage mode*, for running programs similar to normal “run” and “debug” modes
- Reports include



- Summary Coverage View
 - Can highlight coverage in Eclipse code editors as colored annotations
-

2 Oracles

Oracles

A testing *oracle* is the process, person, and/or program that determines if test output is correct

.....



2.1 expect

expect

Covered previously, **expect** is a shell for testing interactive programs.

- an extension of **TCL** (a portable shell script).
- Largely confined to text streams as input/output

.....

2.2 *Unit

*Unit

Can we use *Unit-style frameworks as oracles at the system test level?



- The very question is heresy to many *Unit advocates
 - Particularly runs counter to the goals of the various Mock Objects projects
- But, why not?
 - Such tests do not (should not) be at the expense of having done earlier “proper” unit testing.
 - Particularly in Java, `MyClass.main(String[])` can be called just like any other function
 - * And *System.in*/*varnamecin* and *System.out*/*cout* can be rerouted to/from files or internal strings
 - Major limitation is the accessibility of system inputs & outputs.
 - * GUIs, data bases, etc.



.....

2.3 GUI systems

GUI testing

- Scripting or record/playback: playing back input events for
 - convenience & efficiency
 - consistent reproducibility
- Capture of results
 - Can occur at different levels
 - * event/message level



* graphics level

.....

Some Open Alternatives

- Marathon - free in limited version
- Jemmy

.....

Marathon

For Java GUIs



- Recorder captures AWT/swing events as JRuby scripts
- Scripts can then be edited to alter inputs, add assertions, etc.

```
def test

  $java_recorded_version = "1.6.0_24"

  with_window("Simple Widgets") {
    select("First Name", "Jalian Systems")
    select("Password", "Secret")
    assert_p("First Name", "Text", "Jalian Systems")
  }
end
```

.....



Jemmy

Also for Java GUIs

- Tests scripted as Java
- Integrates with JUnit
 - Example

.....

2.4 Web systems

Web systems

- A subproblem of GUI testing



- Simpler because input structure more constrained
- Output detail level is fixed (http: events)

.....

Some Open Alternatives

- Selenium
- antEater
- Watir

.....



2.5 Selenium

Selenium

- Browser automation (SeleniumIDE - Firefox add-on)
 - Record & playback
 - Or scripted (Selenium Webdriver)
 - * Firefox, IE, Safari, Opera, Chrome

.....

Selenium Scripting



- Actions do things to elements.
E.g., click buttons, select options
- Accessors examine the application state

- Assertions validate the state

Each assertion has 3 modes

- assert: failure aborts the test
- verify: test continues, but failure is logged
- waitFor: conditions that may be true immediately or may become true within a specified time interval

.....



Selenese

A typical scripting statement has the form

Syntax

```
command parameter1 [parameter2]
```

Parameters can be

- locators for finding a UI element within a page (xpath)
- text patterns
- variable names

.....



A Sample Selenium Script

```

<table>
  <tr><td>open</td><td>http://mySite.com/downloads/</td><td></td></tr>
  <tr><td>assertTitle</td><td></td><td>Downloads</td></tr>
  <tr><td>verifyText</td><td>//h2</td><td>Terms and Conditions</td></tr>
  <tr><td>clickAndWait</td><td>//input[@value="I agree"]</td><td></td></tr>
  <tr><td>assertTitle</td><td></td><td>Product Selection</td></tr>
</table>

```

That's right – it's an HTML table:

open	http://mySite.com/downloads/	
assertTitle		Downlo
verifyText	//h2	Terms a
clickAndWait	//input[@value="I agree"]	
assertTitle		Produc

A Selenium “test suite” is a web page with a table of links to web pages with test cases.



.....

Selenium Webdriver

Provides APIs to a variety of languages allowing for very similar capabilities:

```
Select select = new Select(driver.findElement(
    By.tagName("select")));
select.deselectAll();
select.selectByVisibleText("Edam");
```

.....

Waiting

```
WebDriver driver = new FirefoxDriver();
driver.get("http://somedomain/url_that_delays_loading");
```



```
WebElement myDynamicElement = (  
    new WebDriverWait(driver, 10)  
        .until(ExpectedConditions.presenceOfElementLocated(  
            By.id("myDynamicElement"))));
```

Waits up to 10 seconds for an expected element to load

.....

